

3-Phase Surface Track 2000mm

Silver-grey (RAL9006)

Ordernr: A0332003

Housing: Aluminium




Colour: silver-grey powder-coated (RAL 9003)

Weight: 1.7 Kg

Dimensions track: 2000 x 32.5 x 35 mm

Operating Power: 220-250V AC max 16A

Classification: IP-20

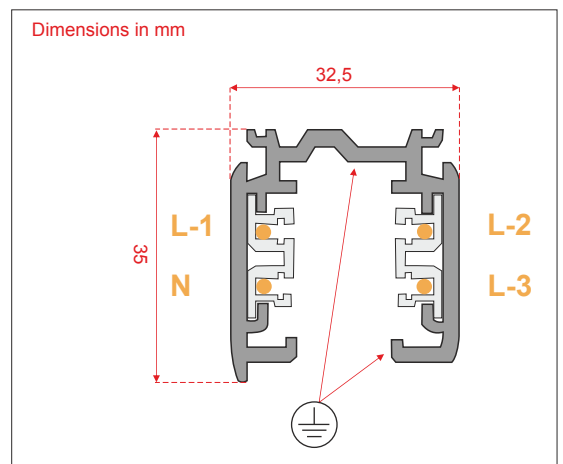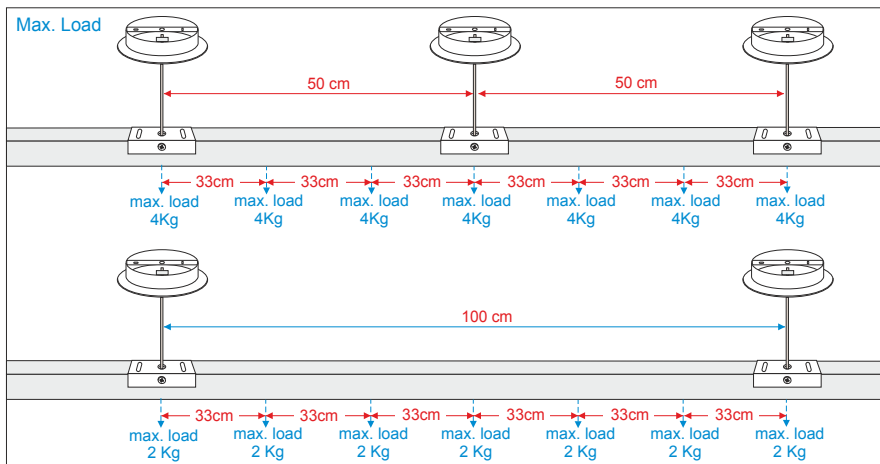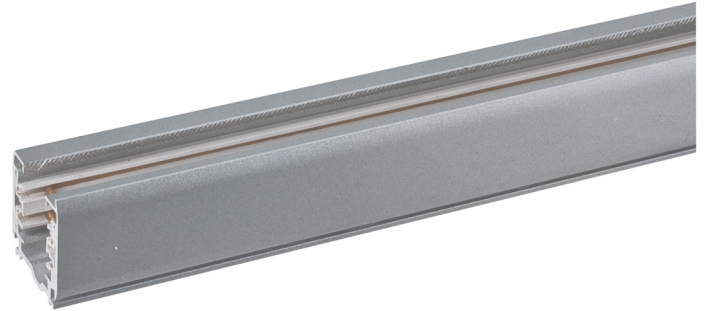

Available accessories:

<p>A0310002 Bending Tool for 3-ph. Track</p>	<p>A0333103 3-Phase Adapter Silver (RAL9006) Operating Power: 220-240V AC max. 6A IP-rate: IP-20</p>	<p>A0333203 3-Phase left feed-in connector Silver (RAL9006) Operating Power: 220-240V AC max. 16A IP-rate: IP-20</p>	<p>A0333213 3-Phase right feed-in connector Silver (RAL9006) Operating Power: 220-240V AC max. 16A IP-rate: IP-20</p>
<p>A0333403 3-Phase straight inner connector Silver (RAL9006) Operating Power: 220-240V AC max. 16A IP-rate: IP-20</p>	<p>A0333503 3-Phase flexible corner connector Silver (RAL9006) Operating Power: 220-240V AC max. 16A IP-rate: IP-20</p>	<p>A0333703 3-Phase left T-connector + power entry Silver (RAL9006) Oper. Power: 220-240V AC max. 16A IP-rate: IP-20</p>	<p>A0333713 3-Phase right T-connector + power entry Silver (RAL9006) Operat. Power: 220-240V AC max. 16A IP-rate: IP-20</p>
<p>A0333303 3-Phase endcap Silver (RAL9006) IP-20</p>	<p>A0333803 3-Phase Ceiling kit Silver (RAL9006)</p>	<p>A0333813 3-Phase Ceiling suspension kit incl. 1.5m steel wire Silver (RAL9006)</p>	<p>A0333823 3-Phase Ceiling suspension kit incl. 1.5m steel wire & Lead Silver (RAL9006)</p>