

ENGLISH

Sunpanel iPW-150 Rigging Bar V1

Ordercode: 33201

Table of contents

Warning2

 Unpacking Instructions.....2

 Safety Instructions2

 Operating Determinations3

 Return Procedure.....4

 Claims.....4

Description of the device.....5

 Features.....5

Major Components5

Installation.....6

Operation8

Maintenance9

Product Specifications9

Warning



**For your own safety, please read this user manual carefully
before your initial start-up!**




Unpacking Instructions

Immediately upon receiving this product, carefully unpack the carton and check the contents to ensure that all parts are present, and have been received in good condition. Notify the dealer immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that the unit must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

Your shipment includes:

- iPW-150 Rigging Bar
- User manual

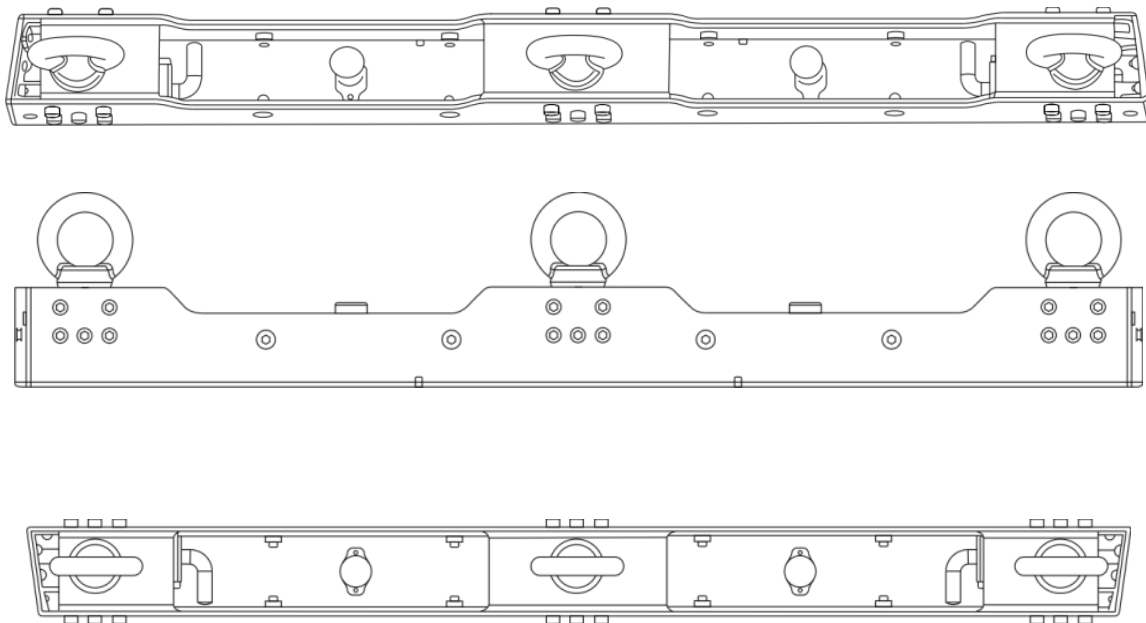

Safety Instructions

Every person involved with the installation, operation and maintenance of this device has to:

- be qualified
- follow the instructions of this manual

Before use, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the device.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

Please consider that damages caused by manual modifications to the device are not subject to warranty.

This device contains no user-serviceable parts. Refer servicing to qualified technicians only.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the device.

- Never remove warning or informative labels from the device.
- Use the device only for the intended purpose.
- Avoid brute force when installing or operating the device.
- Only operate the device after having familiarized with its functions.
- Avoid flames and do not put near electric heaters or gas.
- If the device fails to work properly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your dealer for service.
- For adult use only. The unit must be installed out of the reach of children or unauthorized personnel.
- The user is responsible for correct positioning of the iPW-150 Rigging bar. The manufacturer will not accept liability for damages caused by the misuse or incorrect installation of this device.
- Repairs and servicing must be carried out by a qualified technician.
- WARRANTY: Till one year after date of purchase.

Operating Determinations

- If this device is operated in any other way, than the one described in this manual, the product may suffer damages and the warranty becomes void.
- Always make sure that all components are used within their safe working load before the installation is lifted. Under no circumstances should you exceed the maximum marked load ratings. Raising and lowering of the load should be carried out slowly, avoiding any abrupt changes in load distribution which may result in deformation and fatigue of the components.
- Before use, control all components of the installation for damages, fatigue, deformations, corrosion, loose or missing parts which might in any way influence the safety of the whole installation.
- The support structure should always be inspected and certified by an appropriate technician.
- iPW-150 Sunpanels can be assembled horizontally and their number is then unlimited. When assembled vertically, **the number of the fixtures cannot exceed 6.**

You endanger your own safety and the safety of others!



Return Procedure



Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Authorization Number (RMA number). Products returned without an RMA number will be refused. Highlite will not accept the returned goods or any responsibility. Call Highlite 0031-455667723 or mail aftersales@highlite.nl and request an RMA prior to shipping the fixture. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack fixture, any shipping damage resulting from inadequate packaging is the customer's responsibility. Highlite reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

Note: If you are given an RMA number, please include the following information on a piece of paper inside the box:

- 01) Your name
- 02) Your address
- 03) Your phone number
- 04) A brief description of the symptoms

Claims

The client has the obligation to check the delivered goods immediately upon delivery for any short-comings and/or visible defects, or perform this check after our announcement that the goods are at their disposal. Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise.

It is the customer's responsibility to notify and submit claims with the shipper in the event that a fixture is damaged due to shipping. Transportation damage has to be reported to us within one day after receipt of the delivery.

Any return shipment has to be made post-paid at all times. Return shipments must be accompanied with a letter defining the reason for return shipment. Non-prepaid return shipments will be refused, unless otherwise agreed in writing.

Complaints against us must be made known in writing or by fax within 10 working days after receipt of the invoice. After this period complaints will not be handled anymore.

Complaints will only then be considered if the client has so far complied with all parts of the agreement, regardless of the agreement of which the obligation is resulting.

Description of the device

Features

- Solid and reliable construction
- Easy to assemble
- 3 x hanging ring
- 2 x L-style locking bolt
- 2 x Stand stud adapter

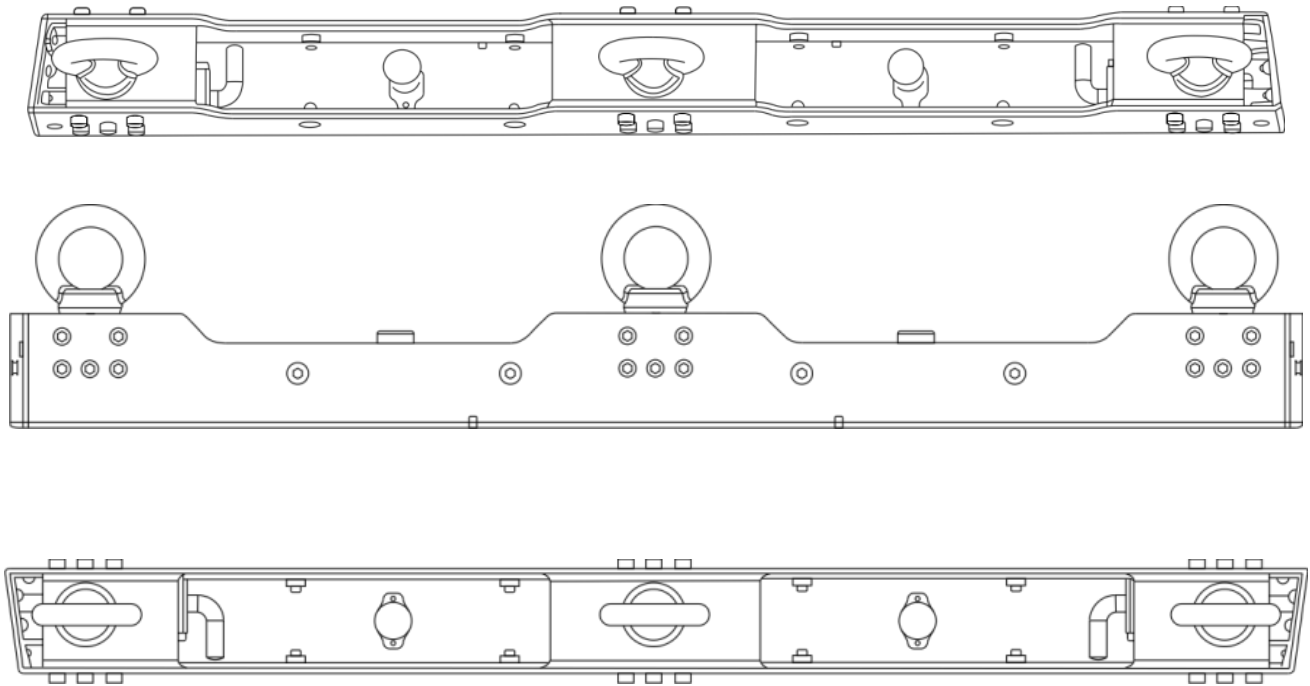


Fig. 01

Note:

01) Sunpanels can be assembled horizontally and then their number is unlimited .

02) When assembled vertically, **the number of the fixtures cannot exceed 6.**

Major Components

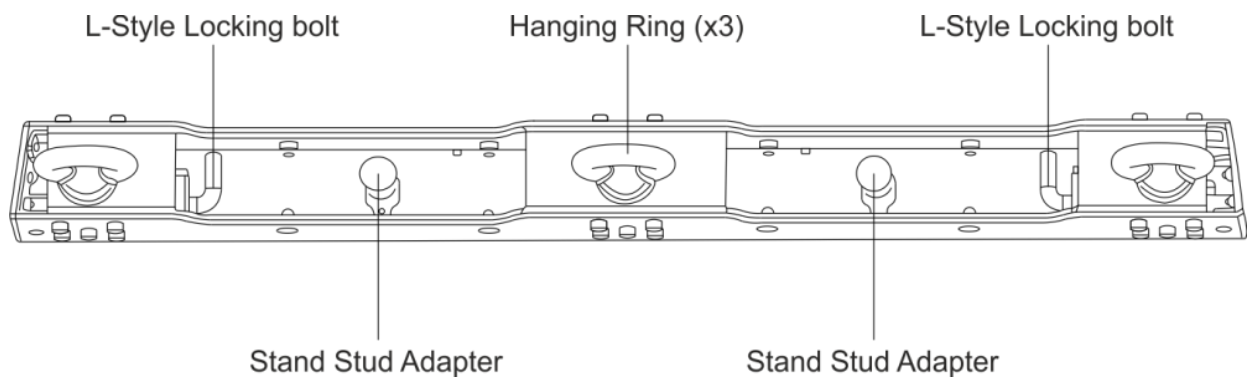


Fig. 02

Installation




Fig. 03

- 01)** Check whether the Stand Stud Adapter is extended out of the bottom. Normally, the factory setting is as shown in fig. 03.




Fig. 04

- 02)** If the Stand Stud Adapter is set as in fig. 04, please press it down and turn clockwise by 90 degrees to keep the screw head line with the slot in the bottom.




Fig. 05

- 03)** Set the L-Style locking bolt upright.

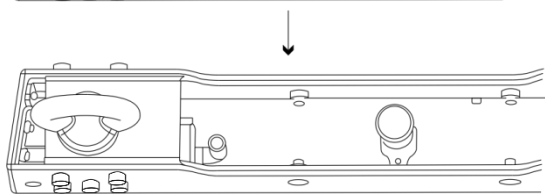



Fig. 06

- 04)** Pull the L-Style locking bolt towards the Stand Stud Adapter as illustrated in fig. 7.

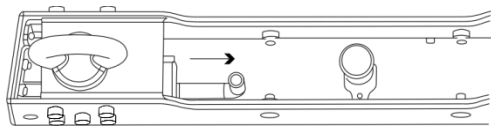


Fig. 07

- 05)** Keep pulling the L-style bolt and turn it right simultaneously, until it is stuck tightly.

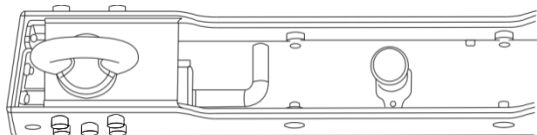


Fig. 08

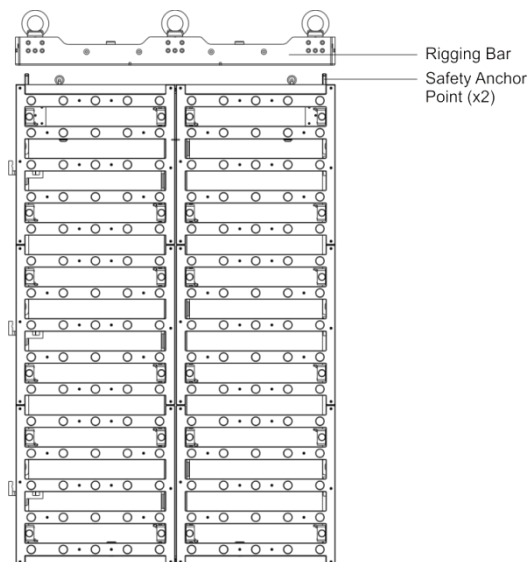


Fig. 09

- 06)** Place the bottom of the Rigging Bar facing to the safety anchor points of the LED Sunpanel.

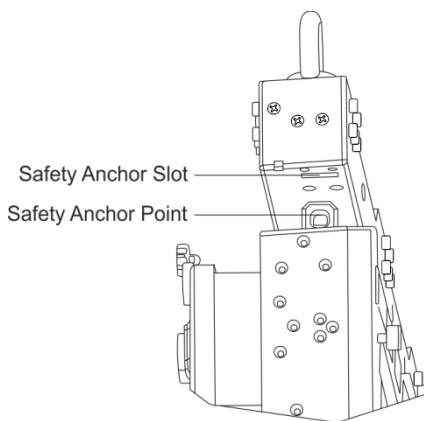


Fig. 10

- 07)** Insert the safety anchor points of LED Sunpanel into the Safety anchor slot of the Rigging Bar.

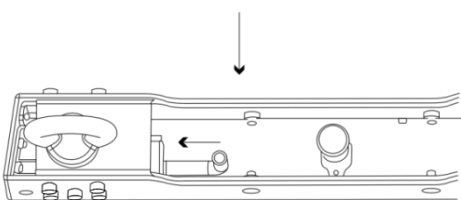
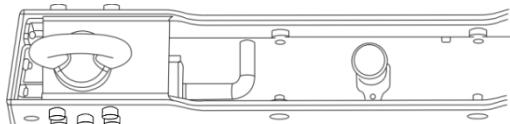


Fig. 11

- 08)** Set the L-Style Locking Bolt upright, then loosen it, the L-Style Locking Bolt will bounce back.

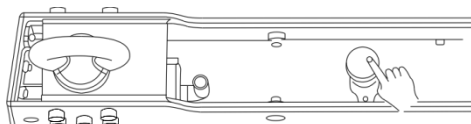


Fig. 12

- 09)** Press down the Stand Stud Adapter then turn it 90 degrees in any clockwise . After attaching to the LED Sunpanel, tighten the screw of the Stand Stud Adapter. Now, the installation is complete.

Operation

The hanging ring of the rigging bar is designed to accept a variety of mounting hooks, clamps , etc. for hanging applications .

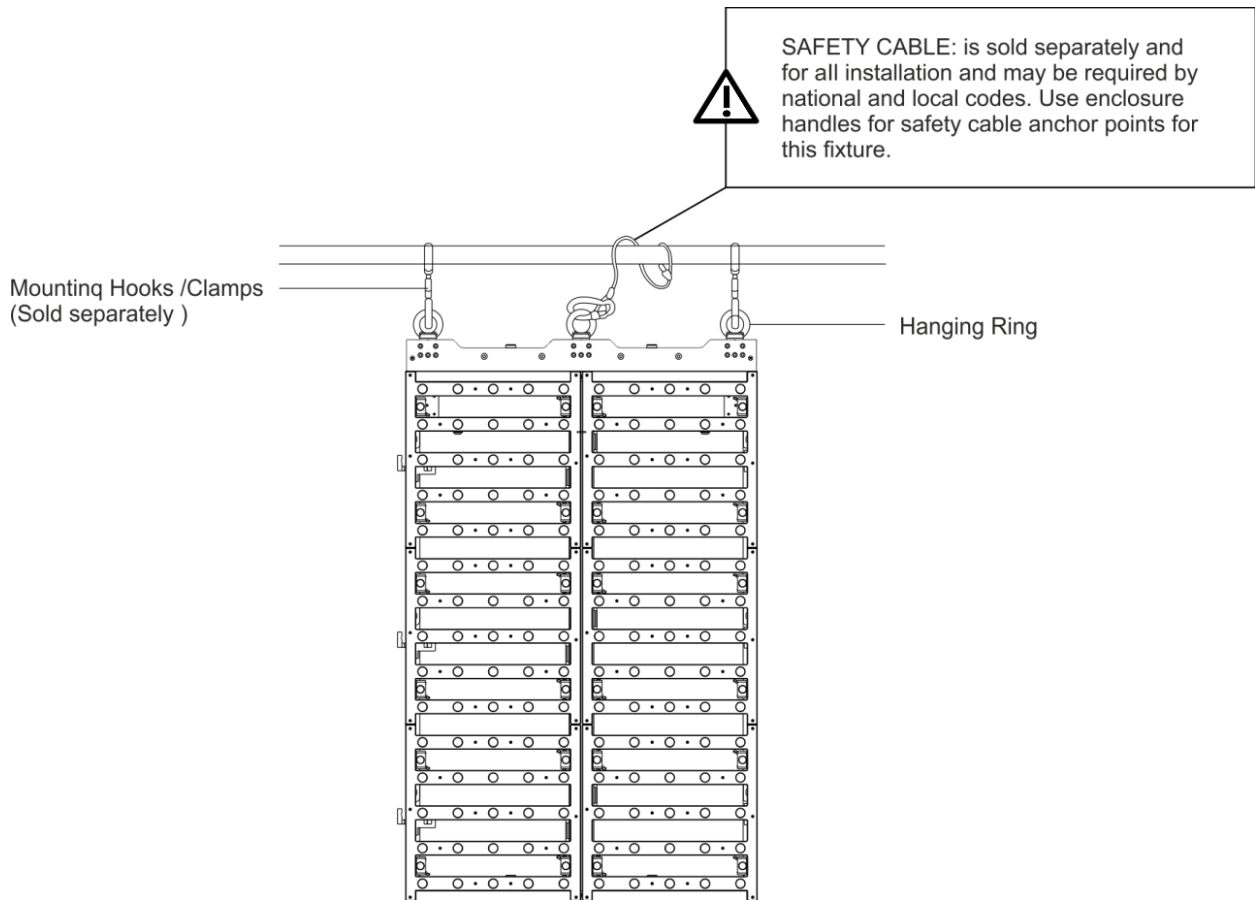


Fig. 13

Note:

- 01) Sunpanels can be assembled horizontally and their number is then unlimited .
- 02) When assembled vertically, **the number of the fixtures cannot exceed 6.**

Maintenance

The iPW-150 Rigging Bar requires almost no maintenance. However, you should keep the unit clean. The components are finished in a black powder coat finish.

In normal conditions, this finish is supposed to protect the main components against corrosion.

Contact with water or corrosive chemicals can weaken elements of the unit.


Regular inspection, carried out by a professional, is of considerable importance.

The application of a moisture displacing lubricant to all parts is highly recommended.

The system should undergo detailed visual inspection every time it is unpacked or packed.

Product Specifications

- Solid and reliable construction
- Easy to assemble
- 3 x hanging ring
- 2 x L-style locking bolt
- 2 x Stand stud adapter
- Dimensions: 795 mm x 65 mm x 140 mm (LxWxH)

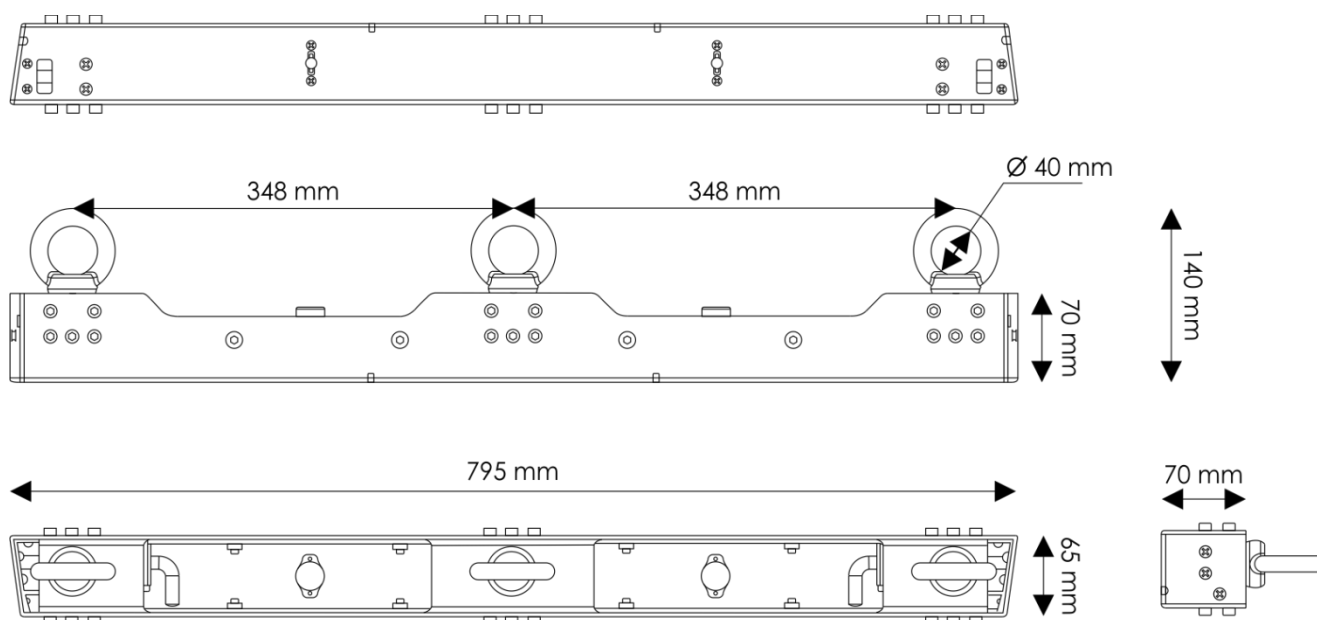

Design and product specifications are subject to change without prior notice.



Website: www.highlite.nl

Email: service@highlite.nl

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. At the top left corner, the word "Notes" is written in a bold, black font. A thick black horizontal line runs across the entire width of the page, positioned just below the word "Notes".



©2015 Infinity